


# ANGLESEY BOLLARD LTD

Manufacturers & Suppliers of Street, Urban and Park Furniture



Concrete base - 500mm x 500mm x 500mm min.  
Mix to BS 5328 Grade C20P or better. (Alternative mix for small mixes would be 50kg Ordinary Portland Cement to 100kg fine agg. to 100kg 20mm nominal size coarse aggregate mixed thoroughly to give medium workability).


Form neat foundation holes with vertical faces and cover the bottom with 50mm layer of concrete.

Accurately position and securely support the components.

Fill hole with concrete not less than specified depth, ensuring full compaction as filling proceeds

Maintain any temporary support and prevent disturbance for at least 48 hours.

Concrete foundation exposed to view to be compacted until air bubbles cease to appear on the upper surface, then weathered to shed water and trowelled smooth.

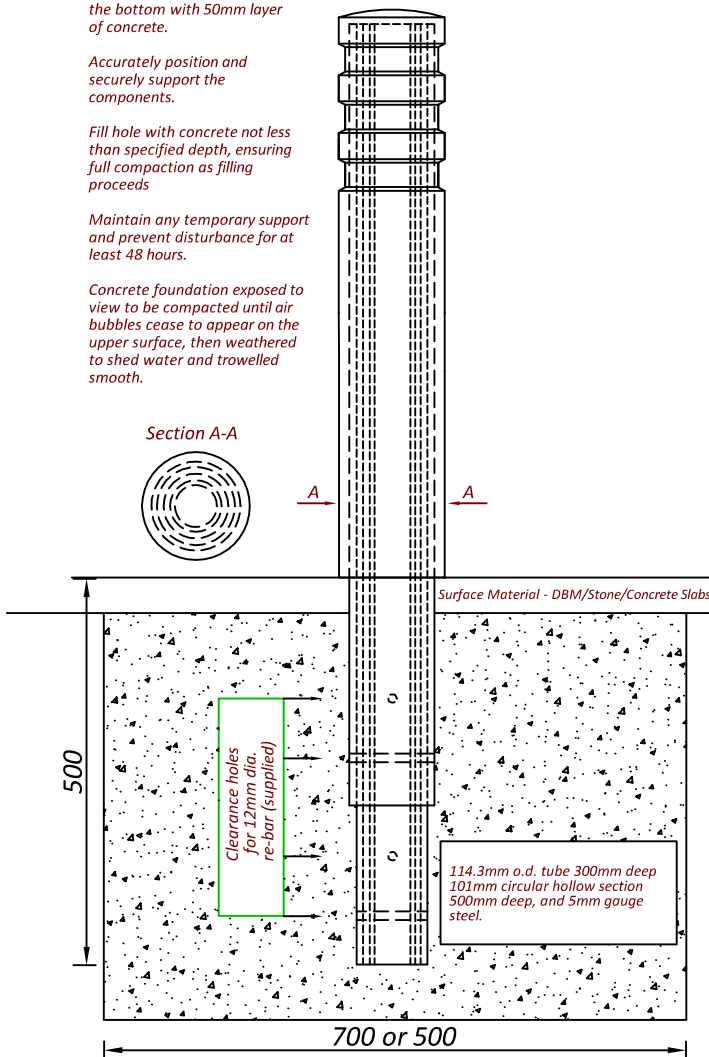

Product Code :  
**ABT-ASHARB(B)-28**

Date :  
**Apr 2012**

Materials :  
**Galvanised steel / Polyurethane**

Scale :  
**Not drawn to scale  
All dimensions in millimetres**

## THE ASHLEIGH ANTI-RAM BOLLARD in Endura-Cast™

*Sometimes referred to as the Aspen Bollard*



Registered address : 11 Nant Bychan, Moelfre, Anglesey. LL72 8HE  
Telephone : 01248 410222 ● Facsimile : 01248 410111 ● Mobile : 07920 400772  
E-mail : tony@angleseybollard.com ● Website : www.angleseybollard.com  
Company Reg. No : 5982140 ● VAT Reg. No : 113 4676 29